



SECTION 7 TAPES, SEALANTS & SOLVENT CEMENTS



PRODUCT LINE	PAGE
Boss136™ Firestop/Draft Sealant	9-10
Boss™ Expanding Foam Sealant	11
Boss™ Adhesives, Lubricants & Sealants	12
Concrete Repair	7-8
Dow Corning™ Silicones	13-15
Hand Cleaner Towels	5
Spray Adhesive	6
Tapes	1-4
Uni-Weld/Oatey Solvent Cements, Primers & Cleaners	17-26





Tapes - Teflon® Thread Seal



HTST Series



Imported Teflon® Thread Seal Tape Features:


- Medium density thread seal tape requires fewer wraps.
- Manufactured from 100% virgin PTFE.
- 3.5 mil thick.
- Mil. Spec. T-27730A.
- Meets ASTM D-3308.

• Teflon® is a Dupont registered trademark

Part Number	Width	Length	Color	Ctn/Case Qty	List Price
HTST260-1/2	1/2"	260 inches	White	144/576	\$ 0.86
HTST260-3/4	3/4"	260 inches	White	144/576	1.25
HTST260-1	1"	260 inches	White	144/576	1.44
HTST520-1/2	1/2"	520 inches	White	144/576	1.29
HTST520-3/4	3/4"	520 inches	White	144/576	1.53
HTST520-1	1"	520 inches	White	144/576	1.72



HTT Series



Made in USA Teflon® Thread Seal Tape Features:

- UL Listed.
 - 100% virgin PTFE.
- HTT260/HTT520 Medium Density Teflon® Tape

- White general purpose
- Medium density.

HTT260-1/2SS Gray Stainless Steel Teflon® Tape

- Nickel pigment added for use on all stainless steel threads.
- Prevents galling, seizing and corrosion.
- High density for coarse SS threads.

HTT260-1/2PP Pink Plumbers Teflon® Tape

- For plumbers and pipe fitters.
- Pink to signify heavier than standard or medium density.

HTT260-1/2GAS Yellow Gas Service Teflon® Tape

- For gas lines of all types- Natural gas, butane, propane.

HTT260-1/2OXY Green Oxygen Teflon® Tape

- Green for oxygen applications. Grease free.
- For all oxygen lines. Will not support combustion.

HTT260-1/2XHD White Extra High Density Teflon® Tape

- For all industrial applications.
- Can be used for water, oil, chemical, medical or food processing.

• Teflon® is a Dupont registered trademark

Part Number	Color	Usage	Thickness	Density	Temp Range	Specs
HTT260	White	General	3.5 mil	.90	-450° F to +550° F	Mil T-27730A
HTT520	White	General	3.5 mil	.90	-450° F to +550° F	Mil T-27730A
HTT260-1/2OXY	Green	Oxygen lines	3.5 mil	1.55	-450° F to +550° F	Mil T-27730A/AA58092
HTT260-1/2PP	Pink	Plumbing	3.5 mil	1.55	-450° F to +550° F	Mil T-27730A/AA
HTT260-1/2XHD	White	Industrial	3.5 mil	1.20	-450° F to +550° F	Mil T-27730A
HTT260-1/2SS	Light Gray	Stainless Steel	3.5 mil	1.55	-450° F to +550° F	Mil T-27730A/AA58092
HTT260-1/2GAS	Yellow	Gas lines	3.5 mil	1.20	-450° F to +550° F	Mil T-27730A

Part Number	Width	Length	Color	Case Qty	List Price
HTT260	1/2"	260 in	White	144	\$ 2.93
HTT520	1/2"	520 in	White	144	4.26
HTT520-3/4	3/4"	520 in	White	144	6.84
HTT520-1	1"	520 in	White	144	9.05
HTT260-1/2OXY	1/2"	260 in	Green	144	8.15
HTT260-1/2PP	1/2"	260 in	Pink	144	8.15
HTT260-1/2XHD	1/2"	260 in	White	144	6.60
HTT260-1/2SS	1/2"	260 in	Light Gray	144	8.15
HTT260-1/2GAS	1/2"	260 in	Yellow	144	6.76



www.americangranby.com
In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (866) 503-5523 Fax (888) 562-2095

9/7/11

7.1



T Series



General Purpose Vinyl Electrical Tape Features:

- Economical, flexible, general purpose electrical tape.
- Use for insulation, protective jacketing and harnessing.
- 7 mil thickness.
- Temperature Range 32°F and 176°F.
- Meets mil spec. MIL-I-7798A.
- Imported

Part Number	Thickness	WidthxLength	Color	Ctn Qty	List Price
T60	7 mil	3/4" x 60 feet	Black	64	\$ 1.97



AWT Series



Premium All Weather Vinyl Electrical and Pipe Wrap Tape Features:

- For use in **all weather** applications.
- Use for insulation, protective jacketing and harnessing and pipe wrap.
- 7 mil thickness, 3/4" or 2" width.
- Temperature range 14 °F and 176 °F.
- Meets Mil. Spec. MIL-1-7798A.
- Tested to ASTM D-1000
- Imported

Part Number	Thickness	WidthxLength	Color	Ctn Qty	List Price
AWT60	7 mil	3/4" x 60 feet	Black	64	\$ 2.22
AWT60-2	7 mil	2" x 60 feet	Black	48	5.64



1700



3M® 1700 Temflex™ Vinyl Electrical Tape Features:

- Economical, flexible, general purpose electrical tape.
- Use for protective jacketing and harnessing.
- 7 mil thickness.
- Temperature rating to 176 °F, 80 °C.
- Meets ASTM D-2301 Type 1.
- Imported



Part Number	Thickness	WidthxLength	Color	Ctn Qty	List Price
1700	7 mil	3/4" x 60 feet	Black	100	\$ 3.39

LISTED 539H
LR48769
Insulating Tape



TS Series

ISO 900 X



3M® Scotch® Professional Use Premium Vinyl Plastic Tape Features:

- Highly conformable, super stretchy in **all weather** applications.
- Resists UV rays, abrasion, corrosion, alkalis and acids.
- Flame Retardent.
- 7 mil tape thickness Super 33+. 8.5 mil thickness Super 88
- Temperature range 0 °F to 220 °F.
- Use as a primary insulation for wire cable splices up to 600V.
- Use as protective jacketing.
- Made in USA. Made for AGI in a ISO 900X facility.

Super 33+
ASTM D-3005 Type I
UL273 & CSA LR48769
Super 88
MIL-I-24391C
ASTM D-3005 Type I
UL 539H & CSA LR48769

Part Number	Thickness	WidthxLength	Color	Ctn Qty	List Price
TS33-20	7 mil	3/4" x 20 feet	Black	10/100	\$ 6.30
TS33-44	7 mil	3/4" x 44 feet	Black	10/100	11.42
TS33-66	7 mil	3/4" x 66 feet	Black	10/100	14.18
TS88-66	8.5 mil	3/4" x 66 feet	Black	10/100	18.06


• Scotch® is a 3M registered trademark





2242

ISO 900 X



3M® 2242 Linerless Electrical Rubber Tape Features:

- Multi-purpose rubber insulating tape.
- Designed for use in splicing and terminating wires and cables.
- Rated up to 194 °F (90 °C) continuous.
- Highly conformable, linerless EPR (Ethylene Propylene Rubber) based tape.
- No Liner for easier handling.
- Excellent thermal dissipation for longer cable life.
- Excellent moisture seal.
- With Flame retardant.
- Meets HH-I-553C and ASTM D-4388 Type I, II, III.

Part Number	Thickness	WidthxLength	Ctn Qty	List Price
2242	30 mil	3/4" x 15 feet	24	\$ 20.26



AGDUCT / HDT / EDT Series

Meets UL723

ISO 9001

Contractor/Industrial Grade Cloth Reinforced Duct Tape Features:

- Multi-purpose duct tapes.
- Polyethylene coated cloth backing.
- Natural rubber based adhesive.
- Temperature range: 40°F to 200 °F.
- Superior tensile strength, adhesion and tack.
- For seaming, sealing and hanging polyethylene or vinyl.
- HDT Series recommended for pool liner installations.
- Conformable and will not curl or twist during application.
- Manufactured for AGI in an ISO9001 facility.

POLYKEN

PolyNash®

Part Number	Thickness	Width x Length	Color	Ctn Qty	List Price
EDT260	7.5 mil	48mm x 55m (2" x 60 yds)	Silver	24	\$ 12.20
AGDUCT	9 mil	48mm x 55m (2" x 60 yds)	Silver	24	19.48
HDT260	10 mil	48mm x 55m (2" x 60 yds)	Silver	24	23.04
HDT260 BLUE	10 mil	48mm x 55m (2" x 60 yds)	Blue	24	23.04
HDT260 GREEN	10 mil	48mm x 55m (2" x 60 yds)	Green	24	23.04
HDT260 RED	10 mil	48mm x 55m (2" x 60 yds)	Red	24	23.04
HDT260 YELLOW	10 mil	48mm x 55m (2" x 60 yds)	Yellow	24	23.04
HDT260 BLACK	10 mil	48mm x 55m (2" x 60 yds)	Black	24	23.04
HDT260 WHITE	10 mil	48mm x 55m (2" x 60 yds)	White	24	23.04

Part Number	Adhesive	Total Thickness (mil)	Tensile Strength (lb/in)	Adhesion to Steel (oz/in)	Flame Spread	Smoked Developed Index
EDT260	Rubber	7.5	19.0	28	--	--
AGDUCT	Rubber	9.0	29.0	45	--	--
HDT260	Rubber	10.0	24.0	60	10	5





Hand Cleaner Towels



SCRUBS® WATERLESS HAND CLEANING TOWELS



So unique they needed a patent! Powerful yet safe cleaning agents work together with an absorbent, non scratching abrasive hand cleaning towel. The result is hands that are clean and protected, with a pleasant fragrance...and are residue free. These shop size, durable towels quickly remove tough to clean substances including: Dirt, Heavy Grease, Adhesives, Lubricants, Oils, Ink, Tar, Wax, Caulk, Sealants, Paint and more.

Scrubs® is registered by Dymon Inc.

Features:

- Pre-moistened, heavy duty towel with pumice scrubbing power.
- Works fast to loosen, dissolve and absorb dirt & grease.
- Deep cleaning scrubbers remove embedded grime easily.
- Conditions and softens hands... *No rinsing. No drying. No residue.*

Part Number	Description	Ctn Qty	List Price
SCRB72	Scrubs 72 Count Bucket	6	\$ 37.50
42293	Scrubs Attachable Bracket	1	26.65



PERMATEX FAST ORANGE® HAND CLEANER WIPES



Fast Orange Hand Cleaner Wipes remove the toughest grease, tar, grime, ink, paints, sealants, adhesives and other difficult soils. Each pre-moistened wipe has a textured surface on one side that is ideal for cleaning heavy-duty soils from hands, tools and work areas. The wipes also have a smooth side for general purpose cleaning.

Suggested applications: Fields service trucks, industrial work stations, construction, utility maintenance, transportation, printing, municipal maintenance, marine and warehouse personnel.

Part Number	Description	Ctn Qty	List Price
25072	72 count bucket	6	\$ 51.56



3M™ BLUE 72 Spray Adhesives

- Pressure sensitive repositionable adhesive
- Aggressive tack and low soak-in.
- Use it for temporarily positioning and holding many fabrics.
- Precise spray control with a wide spray pattern.
- Ideal for pool liner installation
- Manufactured for AGI in an ISO 900 facility.



ISO 9002



3M™ ORANGE FOAM FAST 74 Spray Adhesives

- 74 Foam Fast Adhesive gives fast tack with foam-tearing strength and a soft, non-dimpling glue line.
- Bonds foam to foam, foam to metal.
- Non-misting, precise spray pattern.
- Not for sale in California. Does not meet Aerosol Consumer Products VOC limits.
- Manufactured for AGI in an ISO 900 facility.

Product	Bond Type	Bonding Time	Spray Width	Spray Pattern	Color	Temperature Resistance	Coverage
72	Temp or Permanent	One side-8 hrs Two sides-7 days	3-3.5 in	Controlled Lace	Blue	120°F 48°C	100 sq ft. 9.3 m ²
74	Permanent	One side -not recommended Two sides-15 minutes	1-3 in variable	Lace	Light Orange	120°F 48°C	260 sq ft. 25 m ²

Part Number	Can Size	Ctn/Pallet Qty	List Price
BLUE 72	Blue Spray Adhesive 24 fl oz. can 17.33 oz. net	12/768	\$ 38.98
ORANGE74	Orange spray adhesive 24 fl oz. can 17.33 oz. net	12/768	47.32

Pallet pricing available. Call your Sales Representative.



A simple squeeze to repair horizontal cracks and spalls, and to set anchors

DP600

Horizontal Concrete Repair Features:

Hardens in as little as 5 minutes,

Cracks and spalls in concrete floors are an eyesore as well as a potential safety risk. Fixing them has meant either hiring and waiting for an outside contractor or doing it yourself with a repair method that takes the floor out of service for up to 24 hours. Now with 3M Concrete Repair, you save money and time.

- Self-leveling urethane flows smoothly into cleaned cracks and gaps and hardens in as little as 5 minutes. A fork lift can pass over a repair in as few as 15 minutes.
- Hardens to any depth without cracking or shrinking.
- Flexible urethane expands and contracts for durability that outlasts repairs made with concrete.
- Do it yourself with a common caulking gun and eliminate the cost and wait for an outside contractor.
- *Easy to use - Just clean damaged area and fill. With every squeeze of the caulking gun trigger, cartridge nozzle meters and mixes precise proportions for optimum performance.*



Fill spalls



Custom threading and anchoring

Part Number	Description	Ctn Qty	List Price
DP600	Concrete Repair, 8.4 fl oz cartridge supplied with 2 nozzles	6	\$ 130.21



9" Ratchet Style Caulking Gun

Part Number	Size	Color	Ctn Qty	List Price
CG9	9" Ratchet	Blue	20	\$ 6.36



Horizontal Concrete Repair Specifications:

- Gray, self-leveling urethane concrete repair.
- 8.4 fl oz. cartridge of concrete repair and 2 nozzles.
- Work life of 70 sec.
- Handling time of 5 minutes
- Cure time of 60 minutes

Applications:

- Repairing cracks and spalls on concrete floors or horizontal surfaces.
- Setting anchors in concrete floors or horizontal surfaces.
- Light-duty custom threading and anchoring.
- Use outdoors or in highly ventilated area.

Approximate coverage:

Crack Width	Crack Depth	Linear Feet per 8.4 fl. oz.
1/4"	1/4"	19.3
1/2"	1/4"	9.9
3/4"	1/4"	6.4
1"	1/4"	4.9
1/4"	1/2"	9.9
1/2"	1/2"	4.9
3/4"	1/2"	3.0
1"	1/2"	2.0

Bead Size dimension	Linear Feet per 8.4 fl oz.
1/16"	815.0
1/8"	205.0
1/4"	51.9
3/8"	22.2
1/2"	12.4

Quick and Easy Spall Repair



Clean
Remove all loose material from area to be filled. Concrete should be dry and grease-free.



Fill
Dispense product into deepest part of repair areas, slightly overfilling. Product self-levels and is tack-free in as little as one minute.



Finish
In as little as 15 minutes, product can be sanded to remove rough edges. It can be painted within one hour.



Boss® 136 Firestop/Draft Sealant



BOSS® 136 Firestop/Draft Sealant is a single component fire rated sealant and is a noncombustible filler caulking used for firestopping applications in the annular space around wires, pipes, ducts, vents, cable lines and other penetrations to the building envelope. It is a non-slumping sealant that sets to form a hard surface. **BOSS® 136** can be applied to any gap or penetration where the specification is noncombustible and/or ASTM-E136 rated. **BOSS® 136** is to be used for interior applications only.

The noncombustible specification is common to one and two family construction and to non-rated penetrations in multifamily and commercial construction. **BOSS® 136** is colored red for ease of inspection.

In the event of a fire **BOSS® 136** will prevent the spread of fire, smoke and toxic gases through penetration openings.


BOSS® 136 serves to form a “gasket or seal against air infiltration” as required by the Model Energy Code in both performance and prescriptive versions.

REQUIRED AREAS OF USAGE FOR FIRESTOPPING*

Seal ALL areas of penetration as shown in the illustration below.

- ALL - Exterior wall studs (including horizontal penetrations.)
- ALL - Floor penetrations.
- ALL - Ceiling penetrations.
- ALL - Framing around chimneys (at ceiling and floor levels.)

* Always consult local buliding codes.

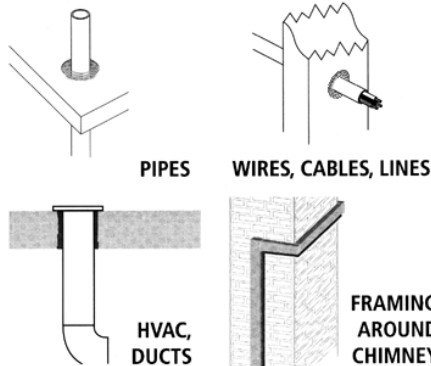

FEATURES:

- Completely non-toxic and contains no asbestos or PCB's.
- Noncombustible.
- Applied with a conventional caulking gun.
- Easily applied sealant with water cleanup capabilities.
- An accredited fire block/smoke seal caulk.
- Single component system, no mixing necessary and no additions required.
- Meets residential construction code approvals including I.R.C.
- For interior applications only.
- Available in traditional cartridge and NEW aerosol can.
- Excellent adhesion to a wide variety of substrate material.

APPLICABLE STANDARDS

- UBC Page 1-378, 1997 edition.
- CABO Section 602.7, Item 4 of the 1995 edition.
- BOCA (NBC) regulation 704.4.1.1 1996.
- ASTM E-136.

Part Number	Description	Ctn Qty	List Price
BOSS136	10.1 oz cartridge	12	\$ 11.28

Boss® 136 Firestop/Draft Sealant



HOW TO USE

- Cut nozzle to desired bead size. Insert cartridge into standard caulking gun.
- For a smooth seal, hold at 45° angle and apply by pushing sealant ahead of nozzle.
- Apply at 40°F or above.
- To ensure good adhesion, all surfaces should be clean and free of dust, oil, loose materials or any other substances.
- Make sure that BOSS® 136 makes complete contact with the entire surface of the opening and also the surface of the penetrating item.

Always follow cartridge directions. Clean the area to be treated so that it is free of all particles and debris. For large openings, mineral wool fibers can be used as a backer to help hold the product in place until cured. Steel screen wire can be stapled in place over the material when a large opening is overhead or configured such that the material will not support its own weight during cure.

TEMPERATURE RANGE

BOSS® 136 freezes in the cartridge at temperatures below 32° F. The product can be warmed and applied at any temperature but will not cure below 40° F. Freeze thaw cycles do not alter the cured product. Cure time may exceed 72 hours at non-freezing temperature.

CAUTION

- Keep from freezing
- Do not take internally
- Keep out of reach of children.

CONTAINS

- Sodium Silicate CAS# 1344-09-8.

COLOR

Boss® 136 Fire/Smoke and Draft Sealant is red in color for ease of inspection.

PACKAGING


Boss® 136 Firestop/Draft Sealant is available in standard 10.1 fl. oz cartridges and 11.0 oz. net wt. aerosol cans.

STORAGE & SHELF LIFE

Boss® 136 should not be stored where the ambient temperatures exceed 120°F or below 35°F. Should freezing occur, insure that product is defrosted fully prior to use. Shelf life is 12 months from the date of shipment. Ensure stock is rotated.

SPECIFICATIONS

Meets or exceeds ASTM E-136 for noncombustible building materials. Conforms to BOCA National Building Code (1996), CABO one and two family dwelling code (1995), Uniform Building Code (1997), Section 796, Fire Block and Draft Stop. BOCA-SBCCI-ICBO-NFPA Building Codes. Consult your local code official for the proper use of product.

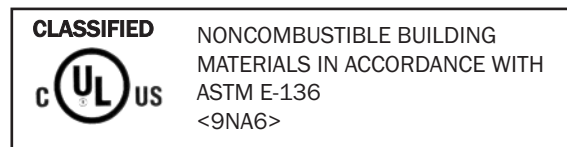

ALSO CLASSIFIED IN ACCORDANCE WITH ASTM E 136-96a, "Standard test method for the behavior of materials in a vertical tube furnace at 750°C."





BOSS® Expanding Foam Sealant



BOSS® 333 Expanding Foam Sealant Features:

- Easy to use, multi-purpose urethane foam.
- Unlike ordinary sealants, it expands **three** times it's original volume.
- Adheres to all building materials except Teflon®, silicone and polyethelene.
- Seals by expanding into gaps, cracks and crevices.
- Uses including insulating, sealing and filling gaps around pipes, plumbing fixtures, ductwork and foundations.
- UL classified.

DIRECTIONS FOR USE:

1. Shake can before and during use.
2. Surface must be clean and free of grease and oil.
3. Can must be held UPSIDE DOWN during application.
4. Insert straw into void and depress the trigger. The use of protective gloves is highly recommended.
5. Fill void 50% full to allow for expansion.
6. Uncured foam can be cleaned with acetone or paint thinner.
7. Cured foam can be trimmed, sanded, painted r stained. Foam **MUST** be painted or covered if application is exposed to UV light.


	R19028 CAULKING AND SEALANTS SURFACE BURNING CHARACTERISTICS APPLIED TO INORGANIC REINFORCED CEMENT BOARD*
	FLAME SPREAD: 5 SMOKE DEVELOPED: 20 38FN
* Tested as applied in three 3/4" beads 5" on center covering 12.5% of the exposed test sample area.	

Part Number	Description	Ctn Qty	List Price
33316B *	Expanding Foam Sealant, 12 oz can w/ application tip	12	\$ 14.55
33324B *	Expanding Foam Sealant, 24 oz can w/ application tip	12	28.47

* SHIPPING NOTE: Ground shipping only. Can NOT be shipped via air.



BOSS® line of adhesives, grouts and lubricants are specifically formulated for use with pools and whirlpool baths.



BOSS® 801 Neutral Cure Silicone Adhesive Features:

- A one part, low odor, non-corrosive, oxime cure adhesive and sealant.
- Provides excellent adhesion to ceramic tile, spa jets, skimmers, lighting fixtures, plumbing and fiber optic lighting.
- Adheres well to fiberglass, ABS, acrylic, PVC, wood and masonry.

BOSS® 802 Acetoxy Cure Silicone General Purpose Adhesive Features:

- A one part, acetoxy cure, adhesive/sealant.
- Performs well in jet sealing applications.
- Designed for many other pool and spa maintenance and repair needs.

BOSS® 803 Neutral Cure Silicone Adhesive/Grout Features:

- A one part, low odor, non-corrosive, oxime cure silicone grout.
- Formulated for use in repairing tile installations.
- Adheres well to fiberglass, ABS, acrylic, PVC, wood and masonry.

BOSS® 804 Neutral Cure Silicone Ceramic Tile Grout Features:

- A one part, low odor, non-corrosive, oxime cure silicone grout.
- Spreads easily and provides ample tooling time.
- Excellent adhesion to all ceramic tiles

BOSS® 820 Pool & Spa Silicone Lubricant Features:

- Water washout resistant and non-solidifying compound.
- Provides superb lubricant for rubber o-rings.
- Non-corrosive, silicone lubricant compound.

Part Number	Description	Ctn Qty	List Price
80100B	Silicone Adhesive Clear, 10.3 oz cart	12	\$ 15.31
80101B	Silicone Adhesive White, 10.3 oz cart	12	15.31
80200B	Silicone Adhesive Gen Purpose, Clear 10.3 oz. cart	12	9.37
80201B	Silicone Adhesive Gen Purpose, White 10.3 oz cart	12	9.37
80331B	Silicone Adhesive Grout, Clear 3 oz. tube	12	7.65
80401B	Silicone Ceramic Tile Grout, White 10.3 oz cart	12	15.31
82001B	Pool & Spa Lubricant Clear, 1 oz tube bulk	288	5.18
82002B	Pool & Spa Lubricant Clear, 1 oz tube 36 pc tub	36	249.90
82030B	Pool & Spa Lubricant Clear, 3 oz tube	12	7.88
82000B	Pool & Spa Lubricant Clear, 5.3 oz tube	12	13.21



Dow Corning® General Purpose Silicone Sealant



PLB 90 Series

Dow Corning® General Purpose Silicone Sealant Features:

- Cures to 100% silicone rubber.
- One part, ready to use. Fast cure, high strength.
- Resistant to sunlight & weather extremes.
- Remains flexible; will not become brittle, crack or tear.
- Removable, reusable, resealable nozzle.
- Meets the requirements of FDA Regulation No. 21CFR177.2600.



Dow Corning General Purpose Silicone Sealant is a one-part acetoxy cure silicone sealant for general purpose applications. Provides a flexible bond and will not harden or crack. Trademate General Purpose Silicone Sealant is a high performance sealant, with +/- 25% movement capability when properly applied.

It can be used as a bedding material, formed-in-place gaskets and bumpers. Adhere trim, name plates, signs. Seal around sinks, faucets, showers, tubs, toilets and vents. It can be used for most marine applications. Seal between hull and deck, most boat decks, windows, port lights, windshields and hatches.



Product Properties:

Tooling Time *	.5-10 minutes
Tack Free Time *	.15-20 minutes
Complete Set-up time *	.24 hours (1/8")
Cure System	.Acetoxy
Application Temperature Range	-20° F to 122° F -29° C to 50° C
As Cured (after 7 days)	
Durometer hardness Shore A	.27 points
Tensile Strength	.350 psi
Elongation	.600 %
Temperature Range - continuous	-40° F to 350° F -40° C to 176° C
Movement capability	./+/- 25%

* At 77° F (25° C) and 50% relative humidity

Approval/Specifications:

- ASTM C920 Type S, Grade NS, Class 25, Use NT, G and A.
- Federal Specification TT-S-001543A, Type non-sag, Class A,
- Federal Specification TT-S-00230C, Type II, Class A

Storage:

- Store below 90° F (32° C) in a dry place.
- To store short term, replace cap.
- To store long term, unscrew nozzle, screw cap in cartridge and store nozzle in cap.

Limitations:

- Not for structural glazing
- Not paintable
- Not suited for prolonged submersion in water or below-grade applications.
- May not adhere to oily woods or be compatible with substrates made of methylmethacrylate, polycarbonate, polypropylene, polyethylene and polytetrafluoroethylene.
- Not suitable for surfaces that might bleed oils, plasticizers or solvents or porous surfaces such as cement-like materials, stone or surfaces prone to attack by weak acids.
- May not cure properly if used in spaces confined from atmospheric moisture.
- May cause corrosion on some brass, copper, zinc or zinc-alloy containing fixtures (galvanized).
- This product is neither tested nor represented as suitable for medical or pharmaceutical uses.
- Not for use where abrasion and physical abuse are encountered.



9" Ratchet Style Caulking Gun

Part Number	Size	Color	Ctn Qty	List Price
PLB90C	10.3 oz. cartridge	Clear	12	\$ 9.90
PLB90W	10.3 oz. cartridge	White	12	9.90
CG9	9" Ratchet	Blue	20	6.36



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (866) 503-5523 Fax (888) 562-2095

www.americangranby.com

2/16/12

7.13

Dow Corning® Tub, Tile & Ceramic Silicone Sealant



PLB 100 Series


Dow Corning® Tub, Tile & Ceramic Silicone Sealant Features:

- Cures to 100% silicone rubber.
- One part, ready to use. Fast cure, high strength.
- **Cured silicone is mildew resistant**
- Remains flexible; will not become brittle, crack or tear.
- Removable, reusable, resealable nozzle.
- Clear & almond colors meet the requirements of FDA Regulation No. 21CFR177.2600.



Dow Corning Tub, Tile & Ceramic Silicone Sealant is a one-part acetoxycure silicone sealant for non-porous surface applications requiring a **mildew-resistant** sealant. This versatile material can be used as an adhesive, sealant, or grout for repairing or replacing ceramic tiles as well as in many other plumbing applications. It can be used for tub and shower enclosures.

It can be used to form watertight seals around bathtubs, shower enclosures, sink vanities, countertops, lavatories, faucets, saunas, hot tubs, plumbing fixtures, drains, piping, shower doors and floor seams.



Product Properties:

Tooling Time *	.5-10 minutes
Tack Free Time *	.15-20 minutes
Complete Set-up time *	.24 hours (1/8")
Cure System	.Acetoxycure
Application Temperature Range-20 °F to 122 °F-29 °C to 50 °C
As Cured (after 7 days)	
Durometer hardness Shore A27 points
Tensile Strength325 psi
Elongation600 %
Temperature Range - continuous-40 °F to 350 °F-40 °C to 176 °C
Movement capability+/- 25%

* At 77 °F (25 °C) and 50% relative humidity

Approval/Specifications:

- ASTM C920 Type S, Grade NS, Class 25, Use NT, G and A.
- Federal Specification TT-S-001543A, Type non-sag, Class A,
- Federal Specification TT-S-00230C, Type II, Class A

Storage:

- Store below 90° F (32 °C) in a dry place.
- To store short term, replace cap.
- To store long term, unscrew nozzle, screw cap in cartridge and store nozzle in cap.

Limitations:

- Not for structural glazing
- Not paintable
- Not suited for prolonged submersion in water or below-grade applications. Not for aquarium use as product contains a fungicide.
- May not adhere to oily woods or be compatible with substrates made of methylmethacrylate, polycarbonate, polypropylene, polyethylene and polytetrafluoroethylene.
- Not suitable for surfaces that might bleed oils, plasticizers or solvents or porous surfaces such as cement-like materials, stone or surfaces prone to attack by weak acids.
- May not cure properly if used in spaces confined from atmospheric moisture.
- May cause corrosion on some brass, copper, zinc or zinc-alloy, containing fixtures (galvanized).
- This product is neither tested nor represented as suitable for medical or pharmaceutical uses.
- Not for use where abrasion and physical abuse are encountered.



9" Ratchet Style Caulking Gun

Part Number	Size	Color	Ctn Qty	List Price
PLB103C	3 oz tube	Clear	12	\$ 7.17
PLB103W	3 oz tube	White	12	7.17
PLB100C	10.3 oz cartridge	Clear	12	11.00
PLB100W	10.3 oz cartridge	White	12	11.00
CG9	9" Ratchet	Blue	20	6.36




Dow Corning® HVAC/R and Hi-Temp



Dow Corning HVAC/R & HI-TEMP Silicone Sealant Features:

- Cures to 100% silicone rubber.
- One part, ready to use. Fast cure, high strength.
- Resistant to sunlight and weather extremes.
- Remains flexible; will not become brittle, crack or tear.
- Removable, reusable, resealable nozzle.
- **HI-TEMP:** Performs at temperatures ranging from -40° to 500° F (-40° to 260° C) for continuous operation and up to 575° F (302° C) for intermittent exposure.
- **HVAC:** Meets the requirements of FDA Regulation No. 21CFR177.2600.




Dow Corning HVAC/R Silicone Sealant is a one-part RTV (room temperature vulcanizing) acetoxy cure silicone sealant for heating, ventilation, air conditioning and refrigeration applications. Provides flexible bonds that will not crack, shrink or chalk. It forms a long-lasting, water resistant seal with +/- 25% movement capability.

It can be used on most glass, plastic, metal, painted surfaces, fiberglass and ceramic. Seal refrigerator and air conditioner interiors, around electrical boxes and equipment, and joints in food, dairy and beverage/coolers/display units. Forms watertight seals around outdoor vents, pipe openings and electrical penetrations when properly applied.

Dow Corning Hi-Temp Silicone Sealant is a one-part acetoxy cure silicone sealant that cures to a tough, rubbery solid at room temperature on exposure to water vapor in the air. It forms a long-lasting, water resistant seal with +/- 25% movement capability when properly applied.

It can be used on bag filters on smoke stacks, sealing fired heaters, access doors and flanged pipe joints, flues on gas appliances, heating elements in appliances, plywood drying oven doors, windows in oven doors and other critical bonding and sealing where parts must perform at high temperatures.



Approval/Specifications:

- ASTM C920 Type S, Grade NS, Class 25, Use NT, G and A.
- Federal Specification TT-S-001543A, Type non-sag, Class A,
- Federal Specification TT-S-00230C, Type II, Class A

Limitations:

- Not for structural glazing
- Not paintable
- Not suited for prolonged submersion in water or below-grade applications.

Product Properties: HVAC

Tooling Time *5-10 minutes
 Tack Free Time *15-20 minutes
 Complete Set-up time *24 hours (1/8")
 Cure SystemAcetoxy
 Application Temperature Range-20° F to 122° F
-29° C to 50° C
 As Cured (after 7 days)
 Durometer hardness Shore A27 points
 Tensile Strength325 psi
 Elongation600 %
 Temperature Range - continuous-40° F to 350° F
-40° C to 176° C
 Movement capability+/- 25%
 * At 77° F (25° C) and 50% relative humidity

Product Properties: HI-TEMP

Tooling Time *5-10 minutes
 Tack Free Time *15-20 minutes
 Complete Set-up time *24 hours (1/8")
 Cure SystemAcetoxy
 Application Temperature Range-20° F to 122° F
-29° C to 50° C
 As Cured (after 7 days)
 Durometer hardness Shore A30 points
 Tensile Strength325 psi
 Elongation500 %
 Temperature Range - continuous-40° F to 500° F
-40° C to 260° C
 Movement capability+/- 25%
 * At 77° F (25° C) and 50% relative humidity



9" Ratchet Style Caulking Gun

Part Number	Description/Size	Color	Ctn Qty	List Price
PLB300C	HVAC 10.3 oz. cartridge	Clear	12	\$ 11.00
PLB400R	HITEMP 10.3 oz. cartridge	Red	12	28.43
CG9	9" Ratchet	Blue	20	6.36



In the United States: Phone (800) 776-2266 Fax (800) 729-3299
 In Canada: Phone (866) 503-5523 Fax (888) 562-2095

www.americangranby.com

2/16/12

7.15

Pipe Joint Compound



Oatey Great Blue® and Great White® (with PTFE) Pipe Joint Compounds are non-separating thread sealant compounds formulated to seal threaded connections against leakage on metal and plastic pipe and fittings.



- Can be used on pipe made of: ABS, Aluminum, Iron, Brass, Copper, CPVC, Fiberglass, PVC, Polypropylene, Polyethylene and **STAINLESS STEEL**.
- Compounds permit a tighter assembly with lower torque, secure permanent sealing of threaded connections and allow for easy disassembly without stripping or damaging threads.
- For use on pipe up to and including 2" diameter.
- Soft set, flexible, non-hardening paste.
- Non-toxic, lead free, non-staining.
- Brush top applicator included.



Product Properties:	GREAT BLUE	GREAT WHITE W/ PTFE
Pressure Rating		
Liquids	10,000 psi	10,000 psi
Gases	3,000 psi	3,000 psi
Temperature Rating	-50° F to 400° F	-50° F to 400° F
Required Dry Time	Up to 125 psi, no wait Over 125 psi, 4 hours	Up to 125 psi, no wait Over 125 psi, 4 hours
Appearance	Blue Paste	White Paste
Shelf Life	2 years from mfg	2 years from mfg

Approvals & Listings:					
		Requirement 4-90	Standard 61 for potable water	IAPMO listed	Standard 61 for potable water

FGG/BM System Compatible indicates that this product has been tested and is monitored on an ongoing basis to assure its chemical compatibility with FlowGuard Gold® water distribution and Blazemaster® fire sprinkler systems.

Directions for Use:

Clean all pipe threads. Be sure all joints are free from rust, scale, grease or other contamination. Remove any debris with a clean cloth or wire brush. Stir contents thoroughly and apply evenly to male threads.

Part Number	Description	Size	Color	Ctn Qty	List Price
31261	Great Blue Pipe Joint Compound	4 oz.	Blue	12	\$ 8.95
31262	Great Blue Pipe Joint Compound	8 oz.	Blue	12	16.35
31263	Great Blue Pipe Joint Compound	16 oz.	Blue	24	25.65
31230	Great White PTFE Pipe Joint Compound	4 oz.	White	12	9.95
31231	Great White PTFE Pipe Joint Compound	8 oz.	White	12	19.45
31232	Great White PTFE Pipe Joint Compound	16 oz.	White	24	30.48
31233	Great White PTFE Pipe Joint Compound	32 oz.	White	12	54.22



PVC Solvent Cements

United Elchem UNI-WELD

PVC REGULAR CLEAR CEMENTS

LO-VOC



2200 Series
CLEAR


- Regular bodied, clear cement for use on PVC pipe and fittings. Up to 4" for DWV Sch 40 and up to 2" for Sch 80.
- Recommended for ALL grades and types of PVC pipe and fittings, potable water and DWV.
- Sets up quickly.
- Recommended application temperature 40°F to 110°F.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
2266S	4 oz.	24	\$ 8.05
2256S	8 oz.	24	12.17
2246S	16 oz.	24	20.46
2236S	32 oz.	12	35.22
2224	1 gallon	6	125.51

PVC REGULAR CLEAR ADVANCED CEMENTS

LO-VOC



2800 Series
CLEAR


- Regular bodied, clear cement for use on PVC pipe and fittings. Up to 4" for DWV Sch 40 and up to 2" for Sch 80.
- Recommended for ALL grades and types of PVC pipe and fittings, potable water, pressure pipe, gas, conduit and DWV.
- Sets up quickly.
- Recommended application temperature 40°F to 100°F.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
2866S	4 oz.	24	\$ 6.93
2856S	8 oz.	24	11.64
2846S	16 oz.	24	20.30
2836S	32 oz.	12	35.83
2824	1 gallon	6	125.99

PVC MEDIUM CLEAR CEMENTS

LO-VOC



1200 Series
CLEAR

- Medium bodied, clear cement for use on PVC pipe and fittings. Up to 6" for Sch 40 and Sch 80.
- Recommended for ALL grades and types of PVC pipe and fittings, drain, waste and vent pipe, and potable water
- Recommended application temperature 40°F to 110°F.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
1266S	4 oz.	24	\$ 8.45
1256S	8 oz.	24	13.11
1246S	16 oz.	24	22.92
1236S	32 oz.	12	31.94
1224	1 gallon	6	135.87


PVC Solvent Cements



United Elchem
UNI-WELD

PVC MEDIUM GRAY CEMENTS

LO-VOC



1600 Series
GRAY

- Medium bodied, gray colored cement for use on PVC pipe and fittings. Up to 6" for Sch 40 and Sch 80.
- Recommended for ALL grades and types of PVC pipe and fittings, potable water and DWV.
- Recommended application temperature 40°F to 110°F.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
1666S	4 oz.	24	\$ 8.62
1656S	8 oz.	24	13.21
1646S	16 oz.	24	21.56
1636S	32 oz.	12	38.64
1624	1 gallon	6	138.98

PVC MEDIUM "HOT" BLUE CEMENTS

LO-VOC

PLUMB-TITE™



2000 Series
BLUE

- Medium bodied, blue colored cement for PVC pipe and fittings. Up to 6" for Sch 40 and Sch 80.
- **Very fast setting cement formulated for wet conditions and/or quick pressurization and fast installation.**
- Recommended for ALL grades and types of PVC pipe and fittings, potable water, pressure pipe and DWV.
- Blue color fades to clear in direct sunlight.
- No primer needed on non-pressure DWV, where local codes permit.
- Recommended application temperature 40°F to 110°F.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
2066S	4 oz.	24	\$ 9.42
2056S	8 oz.	24	14.71
2046S	16 oz.	24	26.00
2036S	32 oz.	12	38.87
2024	1 gallon	6	180.55



PVC Solvent Cements

United Elchem
UNI-WELD

PVC ALL WEATHER CEMENTS

LO-VOC

POLAR-WELD



2600 Series
CLEAR

- Medium bodied, clear cement for PVC pipe and fittings. Up to 6" for Sch 40 and Sch 80.
- Recommended for ALL grades and types of PVC pipe and fittings, potable water, pressure pipe and DWV.
- Non-pressure DWV, up through 4" diameter: No primer needed, where local codes permit.
- **Formulated for fast initial set-up at temperatures down to -5°F to 110°F.**
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
2666S	4 oz.	24	\$ 11.30
2656S	8 oz.	24	13.58
2646S	16 oz.	24	31.59
2636S	32 oz.	12	51.59
2624	1 gallon	6	185.47

PVC MEDIUM RAIN-R-SHINE® BLUE CEMENTS

LO-VOC



308 Series
BLUE

- Medium bodied, blue colored cement for PVC pipe and fittings. Up to 6" for Sch 40 and Sch 80.
- **Very fast setting cement formulated for wet conditions and/or quick pressurization and fast installation.**
- Recommended for ALL grades and types of PVC pipe and fittings, potable water and DWV.
- Pool/Irrigation installations.
- **No primer needed on non-pressure DWV, where local codes permit.**
- Recommended application temperature 40°F to 110°F.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
30890	4 oz.	24	\$ 8.24
30891	8 oz.	24	13.31
30893	16 oz.	24	19.11
30894	32 oz.	12	38.55
30895	1 gallon	6	127.40



American Granby Inc.™

In the United States: Phone (800) 776-2266 Fax (800) 729-3299
In Canada: Phone (866) 503-5523 Fax (888) 562-2095

www.americangranby.com

4/17/12

7.19

PVC Solvent Cements



United Elchem
UNI-WELD

PVC MEDIUM "HOT" BLUE CEMENTS LO-VOC TURF-TITE




2400 Series BLUE

- Medium bodied, blue colored cement for PVC pipe and fitting. Up to 6" for Sch 40 and Sch 80.
- **Very fast setting cement formulated for wet conditions and/or quick pressurization and fast installation.**
- Recommended for ALL grades and types of PVC pipe and fittings, potable water, pressure pipe and DWV.
- Irrigation installations.
- Fades to clear in sunlight.
- No primer needed on non-pressure DWV, where local codes permit.
- Recommended application temperature 40°F to 110°F.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
2466S	4 oz.	24	\$ 9.13
2456S	8 oz.	24	14.65
2446S	16 oz.	24	25.51
2436S	32 oz.	12	44.82
2424	1 gallon	6	167.69

PVC MEDIUM "HOT" BLUE CEMENTS LO-VOC POOL-TITE



2300 Series
BLUE

- Medium bodied, blue colored cement for PVC pipe and fittings. Up to 6" for Sch 40 and Sch 80.
- **Very fast setting cement formulated for wet conditions.**
- Recommended for ALL grades and types of PVC pipe and fittings, potable water, pressure pipe, gas, conduit, PVC flex pipe and DWV.
- **Color fades to clear in sunlight.**
- **No primer needed on non-pressure DWV, where local codes permit.**
- Recommended application temperature 40°F to 100°F.
- Works on flex to rigid pipe applications.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.

Part Number	Size	Case Qty	List Price
2366S	4 oz.	24	\$ 8.83
2356S	8 oz.	24	13.71
2346S	16 oz.	24	21.08
2336S	32 oz.	12	37.66
2324	1 gallon	6	118.48



PVC, CPVC Solvent Cements

United Elchem
UNI-WELD

PVC MEDIUM CLEAR FAST SET CEMENTS LO-VOC POOL-CLEAR




2900 Series
CLEAR

- Medium bodied, clear cement for PVC pipe and fitting. Up to 6"
- Recommended for Sch 40 and Sch 80 pipe and fittings.
- Also recommended for PVC flex pipe.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
30875	4 oz.	24	\$ 8.29
2946S	16 oz.	24	30.24
2936S	32 oz.	12	50.66
2924	1 gallon	6	154.39

CPVC MEDIUM ORANGE CEMENTS LO-VOC



3200 Series
ORANGE

- Medium bodied, orange colored cement for use on CPVC pipe and fittings. Up to 6"
- For copper tube size (CTS) and Sch 80, potable water pressure pipe.
- Recommended application temperatures down to 40°F to 110°F.
- Meets ASTM F-493.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
3266S	4 oz.	24	\$ 10.35
3256S	8 oz.	24	16.00
3246S	16 oz.	24	31.20
3236S	32 oz.	12	39.82

CPVC FLOWGUARD® GOLD™ LO-VOC 1-STEP YELLOW CEMENTS



319 Series

- Exceeds new environmental requirements and meets various CA district rules.
- For copper tube size (CTS) CPVC hot and cold potable water pipe and fittings up to 2" interference fit only.
- May be used without primer where local codes permit.
- For cold water systems and hot water systems up to 180°F.
- Faster cure time/reduced installation time.
- Meets ASTM F-493.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
31910	4 oz.	24	\$ 11.19
31911	8 oz.	24	17.89
31912	16 oz.	24	32.27


PVC and Multipurpose Solvent Cements



United Elchem
UNI-WELD

PVC HEAVY DUTY CLEAR CEMENTS

LO-VOC



1500 Series
CLEAR


- Heavy bodied, clear cement for PVC pipe and fittings. Up to 18" for Sch 40 and Sch 80.
- Recommended for ALL grades and types of PVC pipe and fittings, potable water and DWV.
- Thick formula fills gaps in large diameter pipe and loose fitting joints.
- Recommended application temperature 40°F to 110°F.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
1566S	4 oz.	24	\$ 6.77
1556S	8 oz.	24	10.64
1546S	16 oz.	24	23.29
1536S	32 oz.	12	38.02
1524	1 gallon	6	117.80

PVC HEAVY DUTY GRAY CEMENTS

LO-VOC



1700 Series
GRAY

- Heavy bodied, gray colored cement for use on PVC pipe and fittings. Up to 18" for Sch 40 and Sch 80.
- Recommended for ALL grades and types of PVC pipe and fittings, potable water and DWV.
- Thick formula fills gaps in large diameter pipe and fitting.
- Recommended application temperature 40°F to 110°F.
- Meets ASTM D-2564.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
1756S	8 oz.	24	\$ 14.87
1746S	16 oz.	24	27.22
1736S	32 oz.	12	47.83
1724	1 gallon	6	170.13

MULTI PURPOSE REGULAR CLEAR CEMENTS

LO-VOC



6200 Series
CLEAR

- Regular bodied, clear cement for ABS, PVC or CPVC up to 4".
- Recommended for pipe and fittings Sch 40 and Sch 80, potable water, pressure pipe and DWV.
- Recommended application temperature 40°F to 110°F.
- Meets performance requirements of ASTM D-2564, D-2235, F-493.
- Meets California Air Quality Management District and other environmental district rules.

Part Number	Size	Case Qty	List Price
6266S	4 oz.	24	\$ 9.33
6256S	8 oz.	24	14.91
6246S	16 oz.	24	20.39
6236S	32 oz.	12	35.26
30848	1 gallon	6	129.99






ABS Solvent Cements

United Elchem
UNI-WELD

ABS MEDIUM BLACK CEMENTS LO-VOC



4400 Series BLACK

- Medium bodied, black cement for ABS pipe and fittings. Up to 6".
- For ALL types and grades of ABS pipe and fittings for DWV.
- **For all non-pressure applications.**
- Recommended application temperatures 40°F to 110°F.
- Meets ASTM D-2235.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
4466S	4 oz.	24	\$ 8.90
4456S	8 oz.	24	12.55
4446S	16 oz.	24	12.85
4436S	32 oz.	12	37.91
4424	1 gallon	6	108.67

ABS TO PVC TRANSITION GREEN CEMENTS LO-VOC



309 Series GREEN

- Medium bodied, green colored cement for use in joining **ABS to PVC in non-pressure transition joints.**
- All schedules up to 6" pipe fittings.
- Recommended application temperature 40°F to 110°F.
- Meets ASTM D-3138.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
30900	4 oz.	24	\$ 9.25
30925	16 oz.	24	23.74
30926	32 oz.	12	42.08



CLEAR PRIMER - NSF LISTED

LO-VOC



9300 Series
CLEAR

- A clear aggressive primer for use on PVC and CPVC pipe and fittings.
- All schedules and diameters.
- Removes all surface dirt, grease and grime as well as softens pipe to allow a fast, secure solvent weld.
- Meets ASTM F-656.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
9366S	4 oz.	24	\$ 8.40
9356S	8 oz.	24	11.73
9346S	16 oz.	24	24.12
9336S	32 oz.	12	34.31
9324	1 gallon	6	123.98

PURPLE PRIMER - NSF LISTED

LO-VOC



8700 Series
PURPLE

- A purple tinted aggressive primer for use on PVC and CPVC pipe and fittings.
- **Exceeds new environmental requirements and meets various CA district rules.**
- For use in areas where plumbing code calls for verification that a primer has been used.
- Removes all surface dirt, grease and grime as well as softens pipe to allow a fast, secure solvent weld.



Part Number	Size	Case Qty	List Price
8766S	4 oz.	24	\$ 9.55
8756S	8 oz.	24	13.20
8746S	16 oz.	24	23.25
8736S	32 oz.	12	31.51
8724	1 gallon	6	123.45

BLUE PRIMER - NSF LISTED

LO-VOC

PRIME-TITE™



8000 Series
BLUE

- A blue-tinted aggressive primer for use on PVC and CPVC pipe and fittings.
- **Blue color fades to clear in direct sunlight.**
- Formulated to work with "TITE" products.
- Meets ASTM F-656.
- Meets California Air Quality Management District and other environmental district rules.



Part Number	Size	Case Qty	List Price
8056S	8 oz.	24	\$ 15.02
8046S	16 oz.	24	25.66
8036S	32 oz.	12	45.98





Primers and Cleaners

United Elchem
UNI-WELD

PURPLE PRIMER/CLEANER LO-VOC



8800 Series
PURPLE

- Purple tinted all purpose primer/cleaner for PVC and CPVC pipe and fittings.
- Removes surface dirt, grease and grime as well as softens pipe to allow a fast, secure solvent weld.
- Less aggressive than clear primer and purple primer.
- Purple tint for verification for code.
- **Exceeds new environmental requirements and meets various CA district rules.**

Part Number	Size	Case Qty	List Price
8866S	4 oz.	24	\$ 8.26
8856S	8 oz.	24	12.33
8846S	16 oz.	24	24.12
8836S	32 oz.	12	33.60
8824S	1 gallon	6	114.95

CLEANER LO-VOC



7300 Series
CLEAR

- Clear cleaner for ABS, PVC and CPVC pipe and fittings.
- All schedules and diameters.
- **Exceeds new environmental requirements and meets various CA district rules.**
- Fast-acting cleaner removes surface dirt, grease and grime.
- Flows freely and evaporates quickly.

Part Number	Size	Case Qty	List Price
7366S	4 oz.	24	\$ 7.21
7356S	8 oz.	24	9.55
7346S	16 oz.	24	16.93
7336S	32 oz.	12	22.54
7324	1 gallon	6	95.17

DAUBERS and EMPTY CANS



- Replacement product daubers.
- Reusable cone top metal containers.

Part Number	Size	Case Qty	List Price
DAUBERS			
31312	Fits 32 oz quart can	48	\$ 3.73
31310	Fits 16 oz pint can	48	3.09
31309	Fits 8 oz 1/2 pint can	24	3.52
EMPTY CANS			
30901	Gallon 2 7/8" mouth	6	29.39

