


FLO-LOCK COMPRESSION



PVC/CPVC Flo-Lock Fitting Features:

- Iron pipe and copper tube size
- For cold (PVC) or hot (CPVC) water use.
- Built in stiffener to insure grip.
- EPDM o-ring seal
- PVC ring for controlling o-ring pressure.
- Stainless steel gripping ring prevents pull-out.
- Rated at 160 psi static pressure @ 72°F.

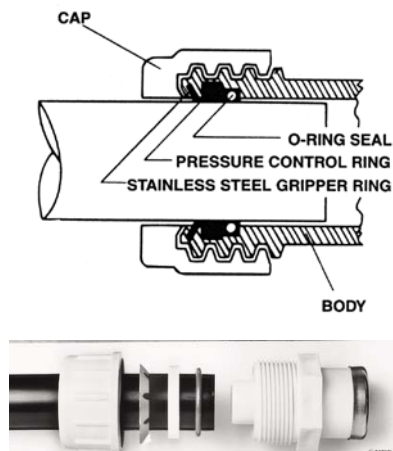

135 Series IPS

NSF/ANSI
61+372

UPC



136 Series IPS

NSF/ANSI
61+372



235 Series CTS

NSF/ANSI
61+372

UPC
* No UPC

Part Number	IPS Size	IPS Connection	Ctn Qty	List Price
-------------	----------	----------------	---------	------------

PVC IPS Male Adapter with Flo-Lock, flo lock x mipt

135-05	1/2"	1/2" mipt	25	\$ 20.64
135-07	3/4"	3/4" mipt	20	25.94
135-10	1"	1" mipt	30	30.90
135-12	1-1/4"	1-1/4" mipt	20	41.59
135-15	1-1/2"	1-1/2" mipt	16	50.00
135-20	2"	2" mipt	12	64.85

PVC IPS Female Adapter with Flo-Lock, flo lock x fipt

136-05	1/2"	1/2" fipt	25	25.46
136-07	3/4"	3/4" fipt	20	31.10
136-10	1"	1" fipt	14	36.20

Part Number	CTS Size	IPS Connection	Ctn Qty	List Price
-------------	----------	----------------	---------	------------

PVC CTS Male Adapter with Flo-Lock, flo lock x mipt

235-05	1/2"	1/2" mipt	50	\$ 24.89
235-10	1"	1" mipt	18	26.99
235-12	1-1/4"	1-1/4" mipt	24	36.57
235-20 *	2"	2" mipt	12	56.08