




## PVC Spring Check Valve Features:

- To stop backflow and syphoning.
- All water applications.
- Maintenance free operation.
- Tapered valve body design & enlarged valve chamber reduces chatter & turbulence.
- Raised radius valve seat, EPDM Seal for positive seal.
- Stainless steel spring load of 1/2 lb. or 2 lb.
- Solvent weld or male and female thread connections.
- 200 P.S.I. static pressure rating @ 72° F.
- Excess solvent cement trap - Designed to help prevent excess cement or softened material from entering into the body and sealing area during installation.
- NSF/ANSI 61+372.

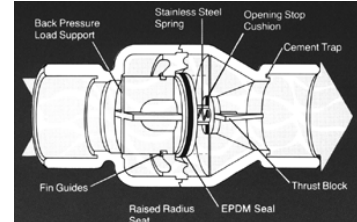

1001, 1011, 1012  
Series

NSF/ANSI  
61+372



1011C Series

NSF/ANSI  
61+372



1800 Series (hex and round)

| Part Number | IPS Size | Body Length | Ctn Qty | List Price |
|-------------|----------|-------------|---------|------------|
|-------------|----------|-------------|---------|------------|

### PVC Spring Check Valves (fip x fip)

Spring Tension 1/2 lb

|         |        |         |    |                 |
|---------|--------|---------|----|-----------------|
| 1001-05 | 1/2"   | 4-1/8"  | 20 | \$ <b>36.81</b> |
| 1001-07 | 3/4"   | 4-1/8"  | 20 | <b>38.22</b>    |
| 1001-10 | 1"     | 5-1/4"  | 20 | <b>54.72</b>    |
| 1001-12 | 1-1/4" | 6-3/16" | 15 | <b>73.84</b>    |
| 1001-15 | 1-1/2" | 6-3/16" | 15 | <b>78.71</b>    |
| 1001-20 | 2"     | 7"      | 10 | <b>113.31</b>   |

### PVC Spring Check Valves (slip x slip)

Spring Tension 1/2 lb

|         |        |         |    |               |
|---------|--------|---------|----|---------------|
| 1011-05 | 1/2"   | 4-1/8"  | 20 | <b>36.93</b>  |
| 1011-07 | 3/4"   | 4-1/8"  | 20 | <b>40.48</b>  |
| 1011-10 | 1"     | 5-1/4"  | 20 | <b>55.88</b>  |
| 1011-12 | 1-1/4" | 6-3/16" | 15 | <b>73.84</b>  |
| 1011-15 | 1-1/2" | 6-3/16" | 15 | <b>78.71</b>  |
| 1011-20 | 2"     | 7"      | 10 | <b>113.23</b> |
| 1011-30 | 3"     |         | 8  | <b>203.88</b> |

### Clear

|          |        |         |    |               |
|----------|--------|---------|----|---------------|
| 1011C-15 | 1-1/2" | 6-3/16" | 10 | 84.64         |
| 1011C-20 | 2"     | 7"      | 10 | <b>132.15</b> |

### PVC Spring Check Valve, (slip x slip)

Spring Tension 2 lbs.

NSF/ANSI  
61+372

|         |        |  |    |               |
|---------|--------|--|----|---------------|
| 1012-10 | 1"     |  | 20 | <b>56.78</b>  |
| 1012-12 | 1-1/4" |  | 15 | <b>76.25</b>  |
| 1012-15 | 1-1/2" |  | 15 | <b>81.26</b>  |
| 1012-20 | 2"     |  | 10 | <b>116.95</b> |

### Foot Valve Screen (polyethylene, 100 mesh)

|         |                    |        |   |              |
|---------|--------------------|--------|---|--------------|
| 1800-10 | 1" round style     | 2-4/5" | 1 | <b>7.85</b>  |
| 1800-12 | 1-1/4" hex style   | 3"     | 1 | <b>11.42</b> |
| 1800-15 | 1-1/2" round style | 3-2/5" | 1 | <b>13.57</b> |
| 1800-20 | 2" round style     | 3-4/5" | 1 | <b>14.82</b> |