



RPS SELECT

RPS® SELECT Rotor


The RPS® SELECT rotary sprinkler is gear-driven for basic residential and light commercial applications. With 4 selectable built-in nozzles, matched precipitation is fast and easy without the need to change nozzles in the field.

Features:

- Four built-in selectable nozzles to match arc settings 90° to 360°
- Adjustable Arc (40° to 360°) made from the top with no special tools needed.
- Matched precipitation rate when nozzle setting matched to arc.
- 3/4" Inlet - Replaces all standard rotors.
- Low pressure operation.
- Standard Rubber Cover
- Proven gear-drive design common to the popular RPS75® series.
- Riser assembly interchanges with Hunter® PGP® rotors
- **Key and check disc also included in master cases.**
- **FULL 5 YEAR WARRANTY. Subject to all standard warranty conditions that apply to all K-Rain rotors.**

Specifications:

- Inlet 3/4" female threaded NPT
- Arc Adjustment Range: 40° to 360°
- Flow range: 1.3 - 6.8 GPM
- Pressure Rating: 30-70 PSI
- Precipitation Rate: 0.23 to 0.71 inches/hour
- Overall height popped down: 7 3/8"
- Recommended spacing: 31' to 44'
- Radius: 33' to 46'

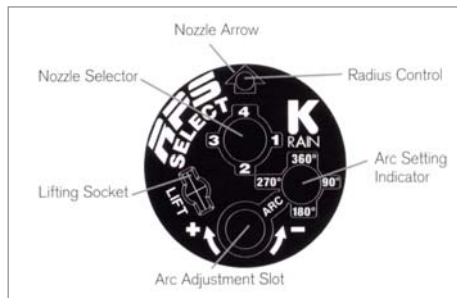

Nozzle	Pressure PSI	Radius Ft.	Flow Rate GPM
#1 90°	30	33	1.3
	35	34	1.4
	40	37	1.5
	45	37	1.6
	50	37	1.8
#2 180°	30	37	2.6
	35	38	2.8
	40	39	3.0
	45	40	3.2
	50	40	3.6
#3 270°	30	37	3.8
	35	40	4.1
	40	41	4.5
	45	41	4.7
	50	43	4.9
#4 360°	30	38	5.2
	35	40	5.7
	40	44	6.0
	45	45	6.4
	50	46	6.8

Part Number	Description	Ctn Qty	List Price
RPS SELECT	RPS Select Rotor	20	\$ 32.80